




T6225-OCP3

High Performance, Dual Port 1/10/25GbE OCP 3.0 Unified Wire Adapter

Enables TCP, UDP, iWARP, iSCSI, NVMe/TCP, FCoE, TLS/SSL, DTLS, NGINX, IPsec, SMB 3.X crypto, and SDN Offload over Single Unified Wire with SR-IOV, EVB/VNTag and DCB

Overview

Chelsio's T6225-OCP3 is a dual port 1/10/25Gb Ethernet OCP 3.0 (Open Compute Project) Unified Wire Adapter, with a PCI Express 3.0 x8 host bus interface, optimized for storage, cloud computing, HPC, virtualization, security, and other datacenter applications in an Open Compute environment. OCP NIC 3.0 specification allows users to utilize compact server designs that can accommodate high-performance adapters with advanced hardware acceleration capabilities.

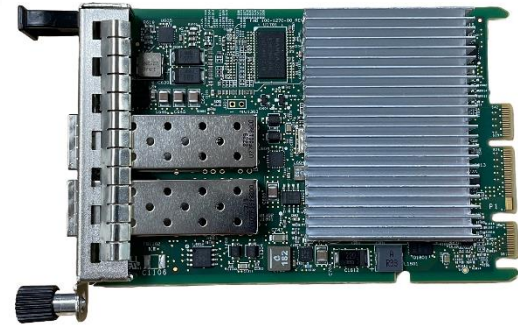

T6225-OCP3 provides sub micro-second end-to-end latency, while offloading the host CPU from a variety of typical storage, network, security, and cloud related protocols. This will enable savings in host CPU acquisition costs, power and operational costs, and dramatically increases system performance. A large portion of offloads enabled by T6225-OCP3 are based on standard TCP, IP, UDP protocols (such as iSCSI, NVMe/TCP, and iWARP), and thus can operate with a software peer, providing the requisite reliability for enterprise customers, and allowing incremental installs in the datacenter. The Ethernet-only networking reduces the infrastructure costs in network adapters, cables, switches, rack space, power, equipment spares, management tools, planning, networking staff, and installation.

T6225-OCP3 supports IEEE standards-based link aggregation/failover features, as well as inter-adapter failover techniques that make it ideal for critical network applications requiring redundancy and high-availability capabilities. It also includes an integrated Traffic Manager for robust and flexible flow control, traffic management and QoS, DCB, PFC, ETC, etc.

FCoE and iSCSI support in T6225-OCP3 benefit from high reliability features that include memory ECC, data path CRC, and T10-DIX offload, in addition to the checksums and CRC available at different protocol layers. High-performance iSCSI and FCoE provide a drop-in replacement upgrade from legacy SANs to converged networks.

T6225-OCP3 runs all the host software of its predecessor, T5, as-is, thus enabling leveraging of all prior software investments. It offers all the features of T5, and in addition adds support for integrated offload of IPsec, TLS/SSL, DTLS, and SMB 3.X crypto. The Converged Network Adapters (CNA) don't have any external memory on them and can offload 256 connections of TOE, iSCSI, iWARP, and NVMe/TCP.

The Unified Wire Solution

T6225-OCP3 enables a unified wire for LAN, SAN, and cluster applications, with a complete set of storage and cluster protocols operating over Ethernet (iSCSI, NVMe-oF, NVMe/TCP, FCoE, and iWARP). A unified wire means having the ability to utilize all offload or non-offload protocols at the same time, over the same link, using the exact same firmware, host software, and adapter. Thus, a given system using T6225-OCP3 can be easily targeted at different vertical markets and a variety of useful functions enabled (i.e. dial the bandwidth to a given application and assign access control, while offloading only part of the traffic).

Highlights

- OCP NIC 3.0 Small Form Factor (SFF)
- PCI Express Gen3 x8
- Low latency user-space I/O
- 32K concurrent offloaded conn. capacity
- Full TCP and UDP offload
- Full iSCSI, FCoE offload
- Full NVMe over Fabrics (NVMe-oF) offload
- Full iWARP RDMA offload
- Full NVMe/TCP offload
- Inline TLS/SSL + TCP Offload
- Inline IPsec offload
- OVS Offload with OpenFlow support
- DPDK (Data Plane Development Kit)
- PCI-SIG SR-IOV
- Integrated media streaming offload
- HW based firewall and NAT offload
- Traffic filtering & management
- IEEE 1588v2 Precision Time Protocol
- Software Compatible with T4 and T5
- Supports x86, Armv8 (Aarch64), IBM Power and OpenPOWER Servers

Applications

Datacenter Networking

- Scale out servers and NAS systems
- Consolidate LAN, SAN and cluster networks
- Enhanced network and server security

Cloud Computing

- Virtualization features to maximize cloud scaling and utilization
- Runs InfiniBand, FibreChannel applications unmodified over Ethernet
- Cloud-ready functional features
- Secure Sockets offload
- QoS and Traffic Management

Networked Storage

- Enable high performance NAS systems and Ethernet-based SANs
- Develop shared-storage systems providing both file and block level services
- Encrypt all communication and data at rest

High-Performance Computing

- Very low latency Ethernet
- High-performance RDMA support
- Increase cluster fabric bandwidth

Web Server

- High-performance NGINX servers with Inline TLS and TCP offload

Specifications

Host Interface

- PCI-E Gen3 x8
- MSI-X, MSI, and support for legacy pin interrupts

Security

- AES 128/256 and SHA1/SHA2 offload
- TLS/SSL, DTLS, IPsec and SMB 3.X crypto support
- Full offload and lookaside co-processor modes

Sixth-Generation Protocol Offload Engine

T6 is Chelsio's sixth-generation TCP offload (TOE) design, fifth-generation iSCSI design, and fourth-generation iWARP (RDMA) implementation. With support for the 8 Gbps PCIe Gen3 data rate, it provides 128Gbps of raw bandwidth. Also provides support for PCIe SR-IOV virtualization with an embedded virtual switch.

Complete and Flexible TCP Offload

The T6225-OC3 transport engine executes programmable firmware and is configurable with hundreds of registers for protocol parameters, RFC compliance, and offload control. It can offload protocol processing per connection, per-server, per-interface, while simultaneously providing complete stateless offload for non-offloaded connections (processed by operating systems stack running on the host CPU). It also provides a flexible direct data placement capability for regular TCP sockets, with all the benefits of zero-copy and kernel bypass without rewriting the applications.

High-Performance Security Offload

T6225-OC3 introduces ground breaking TLS/SSL performance with inline cryptographic functions leveraging Chelsio's proprietary TCP/IP offload engine. Chelsio's Inline TLS/SSL offload is uniquely capable of 100Gbps line-rate performance. In addition, it can be used with inline mode for IPsec and DTLS and in a traditional co-processor lookaside mode to accelerate IPsec, TLS/SSL with AES, SHA1 and SHA2 processing, and SMB 3.X crypto.

Packet Switching and Routing

T6225-OC3 integrates a 264-port high-performance L2-L3 packet switch with integrated access control and flow control support, which allows switching traffic from any of the ports or host queues or physical or virtual functions to each other. The switch can further provide multicast and replication functions in ingress or egress direction. Typical use is for very high-performance OVS offload.

Robust, Proven Solution

Subjected to thousands of hours of compatibility testing, over a decade of stress testing by several OEM test suites, and production deployment in servers, storage systems, and cluster computing, Chelsio's robust, stable protocol offload technology delivers proven performance in wide range of environments.

Ordering Information

Model	Description	Power (W)
T6225-OC3	2x1/10/25GbE Unified Wire	12.5
T6125-OC3	1x1/10/25GbE Unified Wire	12
T6225-SO-OC3	2x1/10/25GbE Converged Network Adapter (CNA)	11.5
T6125-SO-OC3	1x1/10/25GbE Converged Network Adapter (CNA)	11

Physical Interface: 25GBASE-SR/LR*
Connector: SFP28
Media: MMF or SMF or Twinax

Accessories

SM10G-SR/LR: 10G short/long reach SFP optical module
SM25G-SR/LR: 25G short/long reach SFP28 optical module
TAPCABLE-3M: Twinax/DAC passive cable for 10Gb, 3M
TAPCABLE28-3M: Twinax/DAC passive cable for 25Gb, 3M
SRCABLE3M/LRCABLE3M: Short/Long reach fiber optics cable for 10Gb and 25Gb, 3M

* SFP28 optics sold separately. Only Chelsio-supplied modules may be used.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH CHELSIO PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN CHELSIO'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, CHELSIO ASSUMES NO LIABILITY WHATSOEVER, AND CHELSIO DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND OR USE OF CHELSIO PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. CHELSIO PRODUCTS ARE NOT INTENDED FOR USE IN MEDICAL, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS. CHELSIO MAY MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE.

Copyright © 2023 - Chelsio Communications - All rights reserved.

High Performance RDMA

- Low latency and line rate bandwidth
- Enhanced RDMA primitives including Atomics & Immediate data
- Native support for Windows Server 2012-R2, 2016, Azure Stack, Storage Replica, Storage Spaces Direct (S2D), Client RDMA, SMB-Direct, Network Direct, PacketDirect, VMMQ/vRSS
- Support for iSER, NVMe-oF, NFS-RDMA, Lustre-RDMA, Hadoop-RDMA

UDP & Multicast Offload

- UDP Sockets API
- Low user-to-user latency
- Multicast replication on ingress or egress

Virtualization

- PCI-SIG SR-IOV
- 256 Virtual and 8 Physical functions
- 264 port virtual switch
- OVS Offload
- EVB, VEPA, Flex10, VNTag
- 512 MAC addresses
- NVGRE, VXLAN and GENEVE support

TCP/IP Full Offload

- Full TCP stack including IPv4 & IPv6
- Extensive RFC compliance, fully featured
- VLAN support up to 4096 VLAN IDs
- Load balancing and failover capabilities

iSCSI

- iSCSI initiator and target mode stack
- CRC32 offload generation verification
- iSCSI proxy switching based on SCSI CDB
- Full HBA offload
- T10 DIF/DIX support

FCoE

- Full FCoE offload (Initiator or Target)
- Open FCoE offload (Initiator)
- CRC32 offload generation & verification
- Ingress & Egress ACL (Access Control List)
- T10 DIF/DIX support

Unified Boot

- PXE, iSCSI and FCoE support
- Legacy and uEFI environments

Stateless Offloads

- TCP/UDP IPv4/6 checksum offload
- TSO, LSO and GSO for IPv4 & IPv6
- VLAN filtering, insertion & extraction
- Line rate packet filtering and attack protection
- Nanosecond granularity 64b timestamping
- Ethernet Routing (packet header rewrite)
- Packet Tracing and Packet Sniffing

Ethernet

- IEEE 802.3by (25 GbE)
- IEEE 802.3ae (10 GbE)
- IEEE 802.3az Energy Efficient Ethernet
- IEEE 802.3z (1GbE)
- IEEE 802.1p Priority
- IEEE 802.1Q VLAN Tagging
- IEEE 802.1Qbg EVB/VEPA
- IEEE 802.1BR Bridge Port Extension
- IEEE 802.1Qau Congestion Notification
- IEEE 802.3x Flow Control
- IEEE 802.3ad Load-balancing & Failover
- Ethernet II and 802.3 encapsulated frames
- Multiple MAC addresses per interface
- Jumbo Frames up to 9.6 Kbytes

Software Drivers

[Chelsio Download Center](#)

Physical and Environmental

- Fully RoHS Compliant
- Operating Temp: 0° to 55° C or 32° to 131° F
- Operating Humidity: 5 to 95%
- Airflow: 200 lf/m